






# UNFOLD PENDANT LAMP – EU VERSION

**FORM US WITH LOVE ON THE DESIGN** “The industry lamp is a classic, and sought after design that we are excited to provide a new perspective on. The soft silicone rubber gives Unfold a modern and warm personality. It also enables the lamp to be folded into a neat package by a slight push on the top. Just open and unfold your new lamp.”



## DESIGNED BY / YEAR OF DESIGN

Form Us With Love / 2010

## ABOUT THE DESIGNER

Form Us With Love is a multidisciplinary design and interior architecture studio from Stockholm. Their work has been awarded with several prestigious awards such as the Red Dot and the Young Swedish design award. Further accrediting the trio are successful exhibitions at venues like MoMA and the Swedish National Gallery.

## CATEGORY

Pendant lamp

## ENVIRONMENT

Indoor

## DESCRIPTION

Unfold is an interpretation of the classic industry design and comes in a refined material that gives the lamp a modern and warm appearance.

## PRODUCTION PROCESS

The shade is pressed in vulcanised rubber under high temperature. Diffuser and socket holder cut by laser. Extruded cord.

## MATERIAL

Shade - silicone rubber, PVC cord. Diffuser clear frosted opal acrylic material.

## CORD LENGTH

350 cm / 137.75"

## BULB INCLUDED

No

## CANOPY INCLUDED

Yes - White

## DIMABLE FUNCTION


Yes

## CLEANING AND CARE

Clean with soft dry/wet cloth. Always switch off the electricity supply before cleaning.



# UNFOLD PENDANT LAMP - EU VERSION




## LAMP RATING

Voltage	220-240V
Frequency	50Hz
IP Rating	IP20
Classification	Class II
Socket	1 x E27
	Max. 60W Type G bulb
	Max. 20W PL Lamp (self-ballasted)
	Max. 18W LED bulb

## BULB SPECIFICATION

No bulb included

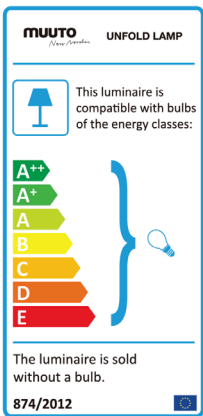

## GENERAL STANDARDS & CERTIFICATES

EU/UK	USA/CANADA	AUSTRALIEN/NEW ZEALAND	CHINA	EXTRA
CE-LVD EN 60598-1:2008+All:2009 EN 60598-2-1:1989 EN 62493:2010	UL UL 1598 CAN/CSA C22.2 No. 250.0-08	RCM AS/NZS 60238:2007 GB7000.1-2007	CCC GB7000.201-2008	<u>Glow wire test</u> IEC 60695-2-10:2000
WEEE				<u>Taiwan</u> BSMI CNS14115 IEC60598/2/4 CNS14335
<u>France</u> COFRAC EN 60598-1:2008+All:2009 EN 60598-2-1:1989				